


BOND BREAKER SYSTEM – CLASS II MEMBRANES

AS3740 requires a “bond breaker” to be installed at the wall/floor joint as outlined in APPENDIX B : B3.5.3(b). This diagram demonstrates our preferred method.



All Waterproofing Membranes manufactured by Concrete Protection are approved to AS4858

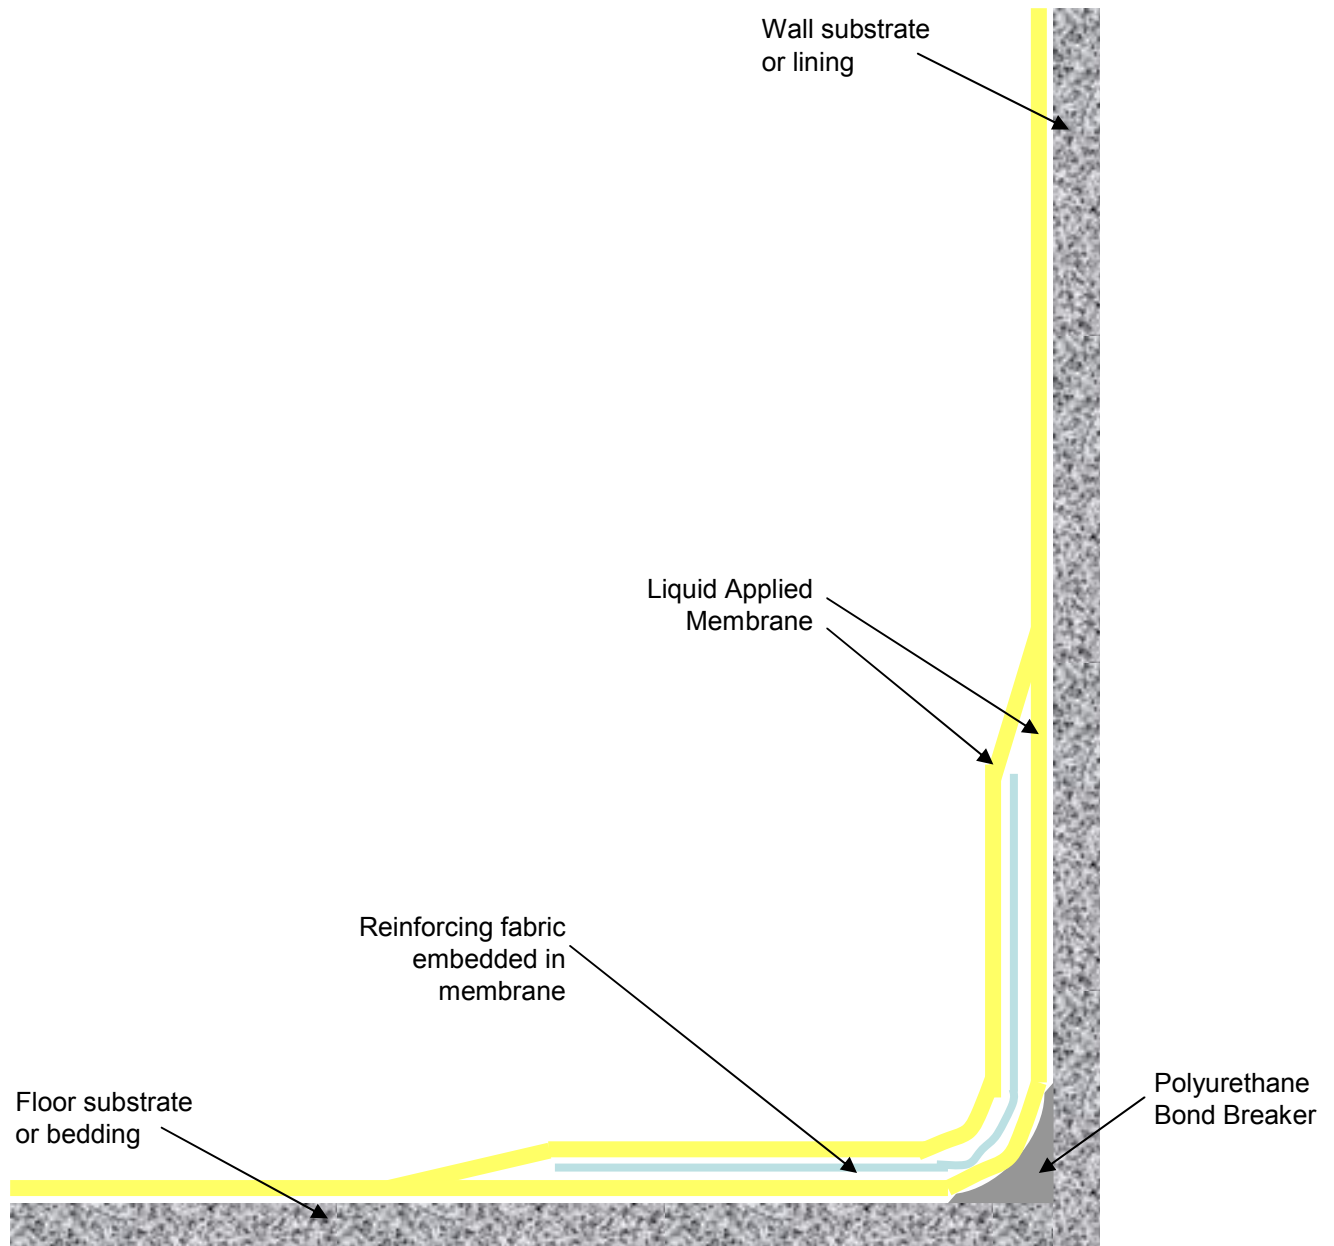

Tel: 9429 3377

Email: info@conpro.com.au

Web: www.conpro.com.au