

# CLASSIQUE

COLLECTION


## Exterior Acrylic Paint

**premium  
exterior  
acrylic  
paint in  
your  
choice of  
colour**

Easy to use, long wearing, interior or exterior acrylic paints suitable for most surfaces.

Water based quality acrylic paints are available in Accent, Deep and White bases to provide the colour of your choice.

**FLAT LOW SHEEN GLOSS**

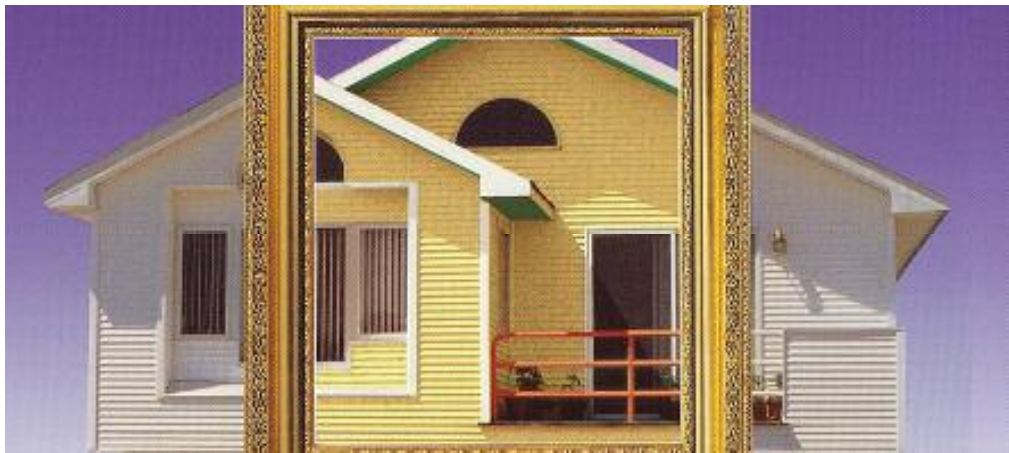

technical information available on web page  
Meeting Australian Standards

**Concrete Protection** Pty Ltd

155 Barkly Avenue, Burnley. Vic. 3121  
www.conpro.com.au

Tel 03 9429 3377 Fax 03 9427 0745

# CLASSIQUE

COLLECTION

## Exterior Acrylic Paint

TECHNICAL DATA




### PREPARATION

Remove grease, dust and dirt by washing down with suitable detergent and warm water. Rinse with clean water. Remove all loose, flaking or peeling material and treat any rust. Fill all nail holes, cracks etc. with suitable filler. Sand to smooth surface and dust down.



### UNDERCOATING

Surfaces previously painted with a glossy finish will require light sanding, an undercoat is optional. Surfaces previously painted with water based paints will not require an undercoat providing full preparation is carried out and the paint types are compatible.



### COVERAGE

As a guide, previously painted surfaces, 16 square metres per litre, unpainted surfaces 7 square metres per litre.



### STIRRING

Stir well before use with a broad, flat stirrer.



### DRYING TIME

At ambient temperature of 25°C. Touch dry 30 minutes. Recoat 4 hours.




### APPLICATION

Apply 2 coats of product, as required, with brush, roller or spray gun. NB: provide adequate ventilation during use. Before application if the paint has been tinted make sure the colour for your requirements and thoroughly mixed.




### TEMPERATURE

Do not apply if the temperature will drop below 10°C or rise above 30°C. Avoid rain and windy conditions during the first 48 hours.



### THINNING

Not usually required. If spraying, thin sparingly with water.



### CLEAN UP

Clean all equipment with water immediately after use.



### CARE OF NEW PAINTWORK

Avoid exposure to steam and condensation for 48 hours after painting. May be cleaned with soft cloth and mild detergent after 7 days.



### GUARANTEE

We manufacture quality paint to exacting standards using the latest technology and the finest raw material available. This paint is guaranteed to perform satisfactorily for its designed purpose when properly applied to well prepared surfaces in accordance with instructions above. If you are not satisfied with the product, return the unused portion with the receipt. Our staff will replace the paint or refund the money in total.