

ARB- Acrylic Resin Binder

50% solids acrylic solution



**Convert
fine stones,
pebbles,
river stones
into a
trafficable
surface**



POISON

**KEEP OUT OF REACH OF CHILDREN
NOT TO BE TAKEN
READ ALL DIRECTIONS BEFORE
OPENING**

Versatile binder for use with applied pebble finishes or thinned as a penetrating sealer for concrete and masonry protection.

DESCRIPTION:

A R B is a solution of a fast-drying thermoplastic acrylic copolymer, which forms a clear film providing a balance of flexibility and hardness. Other characteristics include high durability, visual clarity with 'wet look' colour enhancement, plus resistance to; water, grease and alkali.

UV stable, the product can be used for external and internal applications.

TYPICAL PROPERTIES:

Non-Volatile Content	40%
Viscosity, Gardner-Holdt	Z - Z ²


USES:

Pebble Binder - prime porous surfaces with diluted ARB with Xylene 50:50. Mix ARB with pebbles, allow to drain, apply mix with trowel.

Penetrating Sealer - diluted ARB with Xylene 50:50, apply with brush/roller

CLEANING AND THINNING:

A R B can be removed from tools and equipment with Xylene. Xylene is also used as the prime carrier or thinner.

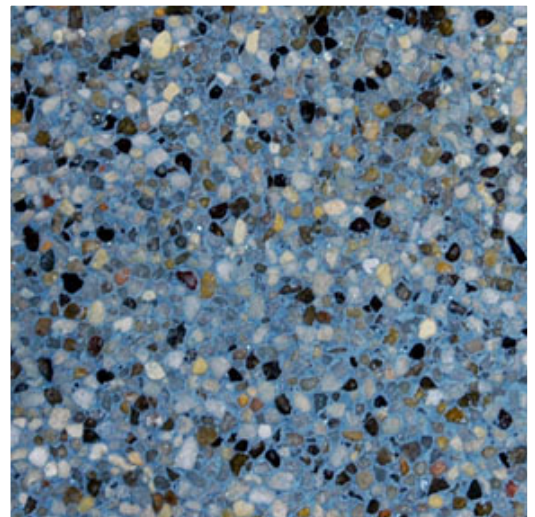

PRECAUTIONS:

A R B is a combustible liquid.

Provide adequate ventilation.

Store away from naked flames, sparks and heating.

Avoid contact with skin and eyes.

Wear protective goggles. If skin contact occurs, wash skin thoroughly.

If swallowed do not induce vomiting, give a glass of water. If poisoning occurs seek medical advice